

**REMARKS**

The Applicants thank the Examiner for the thorough consideration given the present application. Claims 1-28 are pending. Claim 29 is cancelled, and claims 1-28 are amended. Claim 1 is independent. The Examiner is respectfully requested to reconsider the rejections in view of the amendments and remarks set forth herein.

**Allowable Subject Matter**

The Examiner states that claim 1 would be allowable if rewritten to overcome the rejections under 35 U.S.C. 112, second paragraph, and the claim objections, and that claims 2-29 would be allowable if rewritten to overcome the rejections under 35 U.S.C. 112, second paragraph, and the claim objections, as applicable, set forth in this Office Action, and to include all of the limitations of the base claim and any intervening claim.

The Applicants thank the Examiner for the early indication of allowable subject matter in this application. In response, claim 29 is cancelled, and claims 1-28 are amended herein to address each of the issues pointed out by the Examiner. Therefore, independent claim 1 and claims 2-28, which depend directly or indirectly therefrom, should be in condition for allowance.

**Claim for Priority**

It is gratefully acknowledged that the Examiner has recognized the Applicants' claim for foreign priority. In view of the fact that the Applicants'

claim for foreign priority has been perfected, no additional action is required from the Applicants at this time.

**Drawings**

The Examiner has objected to the drawings because not all elements in the claims are shown.

Two sheets of proposed additional formal drawings are being submitted concurrently in a separate letter to the Official Draftsperson. Included are added FIGS. 28 and 29 showing “electrically driven motion transmission means EM” as set forth in claim 26, and added FIGS. 30 and 31 showing “fluid-operated transmission means PC1” as set forth in claim 27. Reconsideration and withdrawal of this objection are respectfully requested.

**Specification Objection**

The Examiner has objected to the specification because of several informalities.

In order to overcome this objection, Applicants have amended the specification in order to correct the deficiency pointed out by the Examiner. In addition, a Substitute Specification is being provided in order to place the application in better form. Also included is a marked-up copy of the original specification which shows the portions of the original specification which are being added and deleted. Applicants respectfully submit that the substitute specification includes no new matter and that the substitute specification includes the same changes as are indicated in the marked-up copy of the original

specification showing additions and deletions. Reconsideration and withdrawal of this objection are respectfully requested.

**Claim Objections**

The Examiner has objected to claims 1-29 because of several informalities. In order to overcome this objection, Claim 29 is cancelled, and claims 1-28 are amended herein in order to correct the deficiencies pointed out by the Examiner. Reconsideration and withdrawal of this objection are respectfully requested.

**Rejection Under 35 U.S.C. § 112, first paragraph**

Claims 26, 27, and 29 stand rejected under 35 U.S.C. § 112, first paragraph. This rejection is respectfully traversed.

The Examiner states that the original specification does not disclose “electrically driven motion transmission means” as set forth in claim 26, “fluid-operated transmission means” as set forth in claim 27, and “electromechanical control system” as set forth in claim 29. Claim 29 is cancelled, and claims 26 and 27 are amended.

Support for amended claims 26 and 27 can be seen in paragraph [0081] of the Substitute Specification. In addition, Applicants have added FIGS. 28-31 showing these transmission means.

Applicants respectfully submit that the claims 26 and 27 are now fully supported by and adequately described in the written description of the

invention. Accordingly, reconsideration and withdrawal of this rejection are respectfully requested.

**Rejection Under 35 U.S.C. § 112, second paragraph**

Claims 1-29 stand rejected under 35 U.S.C. § 112, second paragraph. This rejection is respectfully traversed.

The Examiner has set forth certain instances wherein the claim language lacks antecedent basis or is not clearly understood.

In order to overcome this rejection, claims 1-28 are amended herein to correct each of the deficiencies specifically pointed out by the Examiner. Applicant respectfully submits that the claims, as amended, particularly point out and distinctly claim the subject matter which Applicants regard as the invention. Accordingly, reconsideration and withdrawal of this rejection are respectfully requested.

All claims are in condition for allowance. Accordingly, reconsideration and withdrawal of the rejection under 35 U.S.C. §112, first and second paragraphs are respectfully requested.

**CONCLUSION**

Since the remaining patents cited by the Examiner have not been utilized to reject claims, but merely to show the state of the art, no comment need be made with respect thereto.

All of the stated grounds of rejection have been properly traversed, accommodated, or rendered moot. It is believed that a full and complete

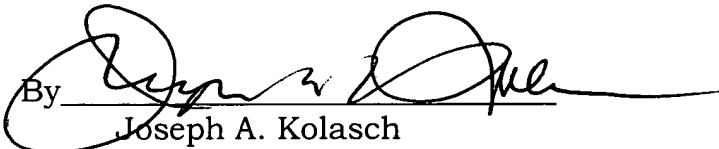
response has been made to the outstanding Office Action, and that the present application is in condition for allowance.


If the Examiner believes, for any reason, that personal communication will expedite prosecution of this application, he is invited to telephone Carl T. Thomsen (Reg. No. 50,786) at (703) 205-8000.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. §§1.16 or 1.17, particularly extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By   
Joseph A. Kolasch  
Reg. No. 22,463

3875-0108P  
JAK/CTT/abs/mua  


P. O. Box 747  
Falls Church, VA 22040-0747  
(703) 205-8000

Attachments:    Version Showing Changes Made to Claims and Abstract  
                      Abstract of the Disclosure  
                      Substitute Specification (Marked-up and Clean copies)

**VERSION SHOWING CHANGES MADE**

In the Abstract of the Disclosure

The Abstract of the Disclosure has been amended as follows:

[SUMMARY] Abstract of the Disclosure

An umbrella-type folding frame [(1)] particularly for push-chairs [and the like, has] having a pair of front upper [(2a', 2b')] and lower [(2a, 2b)] struts, a pair of rear struts [(3a, 3b)], at least one [lock/release] lock-release mechanism [(44, 45)] between each upper strut [(2a', 2b')] and its respective lower strut [(2a, 2b)], an articulated connection structure [(5)] between said rear struts [(3a, 3b)] and a lifting handle [(8)], connected to the [said] articulated structure [(5)], which is designed, upon being actuated, to cause the frame [(1)] to set from an open or extended position to a closed or collapsed position and a driving device [(9)] located on said frame [(1)] at the said lifting handle [(8)] for the remote control of said [lock/release] lock-release mechanism [(44, 45)].

In the Specification

The original specification has been replaced with the enclosed substitute specification.

In the Claims

The claims have been amended as follows:

1. (Amended) An umbrella-type folding frame [(1)] particularly for push-chairs [and the like], comprising:

a pair of front upper [(2a', 2b')] and lower [(2a, 2b)] struts,

a pair of rear struts [(3a, 3b)],

a pair of [support or engagement rigid members] motion transmission means [(4a, 4b)] having one end thereof pivoted to [a respective] rear struts [(3a, 3b)] and [its other] another end thereof slidably engaged with [a respective] upper [strut] struts [(2a', 2b')] and secured to [a respective lower strut] (2a, 2b) thereto,

at least one lock-release mechanism [(45, 46)] between each of the upper [strut] struts [(2a', 2b')] and [its respective] the lower [strut] struts [(2a, 2b)],

a lifting handle [(8)],

an articulated connection structure [(5)] between said rear struts [(3a, 3b)], [a lifting handle[(8)], and

one driving device [(9)] located on said articulated structure [(5)] at [the] said lifting handle [(8)] and arranged to control said lock-release mechanism [(45, 46)],

whereby [the sequential effect of] actuating said driving device [(9)] [being actuated] and lifting said lifting handle [(8)] [being lifted] causes the folding frame [(1)] to [set] change from an open or extended position to a closed or collapsed position.

2. (Amended) [A] The folding frame according to claim 1, wherein said driving device [(9)] includes a manual actuation member [(9a)] arranged to move from a working to a rest position thereof.

3. (Amended) [A] The folding frame according to claim 1, wherein said driving device [(9)] comprises a manual actuation member [(9a, 9d, 9f, 9h 80, 8d)] and a motion transmission means [(11; 41, 41 a, 43, 44, 44a)] arranged between [the] said manual actuation member [(9a, 9d, 9f, 9h 80, 8d)] and said [lock/release] lock-release mechanism [(45, 46)].

4. (Amended) [A] The folding structure as claimed in claim 1, wherein said lifting handle [(8)] comprises a [supporting] support member or portion [(8a)] secured to said articulated connection structure [(5)].

5. (Amended) [A] The folding frame as claimed in claim 1, wherein [the] said articulated connection structure [(5)] comprises a cursor member [(5k)] designed to slide on a rod member [(60)] while the folding frame is being folded or unfolded.

6. (Amended) [A] The folding frame according to claim 5, wherein [the] said driving device [(9)] comprises safety locking means [(9b, 85; 13a, 87; 13c, 5a; 13c)] arranged removably to secure the said lifting handle [(8)] to said cursor member [(5k)] or to said articulated connection structure [(5)].



7. (Amended) [A] The folding frame as claimed in claim 6, wherein [the] said locking means comprises an engaging tooth [(9b)] designed to engage with [an opening (85)] a recess provided in said cursor member [(5k)] when the said articulated connection structure [(5)] is in its extended position.

8. (Amended) [A] The folding frame as claimed in claim 6, wherein [the] said locking means comprises an manual actuation [lever] member [(9a)] having an inclined-plane surface [(90)] arranged to [automatic] automatically engage tooth [(9b)] with [opening (85)] a recess formed in said cursor member [(5k)].

9. (Amended) [A] The folding frame as claimed in claim 6, wherein [the] said driving device is a manual actuation [lever] member [(9a) comprises] comprising a notch [(8c)] in said lifting handle [(8)] and a limit member [(9c)] arranged to abut against said notch [(8c)] thereby preventing [the said] an engagement tooth [(9b)] from accidentally disengaging from a recess [(85)].

10. (Amended) [A] The folding frame as in [any] claim [6 to] 9, [characterized in that the] wherein said actuation [lever] member [(9, 9a)] comprises a loading spring.

11. (Amended) [A] The folding frame according to claim 1, wherein said lifting handle [(8)] comprises an oblong element [(8b)] carried by said articulated connection structure [(5)] and [the said] a manual actuation member [(9a)] comprises a lever member articulated to said oblong element [(8b)] and arranged to actuate the said motion transmission means [(11, 41, 41a, 43, 44, 44a)].

12. (Amended) [A] The folding frame according to [any previous] claim 1, wherein said lifting handle [(8)] comprises a grip [(8d)] portion secured to said articulated connection structure [(5)] and a manual actuation member [(9d)] mounted for angular displacement or rotation relative to said grip [(8d)] and a motion transmission means [(11)] between said angularly displaceable grip [(9d)] and said at least one [lock/release] lock-release mechanism [(45, 46)].

13. (Amended) [A] The folding frame according to claim 4, wherein said handle grip [(8)] comprises a rotating portion pivoted to said supporting member or portion [(8a)] and a pulley member [(80) rigid in rotation with] rigidly attached to said handle [(8)] and operatively connected to said motion transmission means [(11, 41, 41a, 43, 44, 44a)].

14. (Amended) [A] The folding frame according to [any claims] claim 1, wherein said handle [(8)] comprises an end] is formed with a T-shaped

[handling portion(83)] hand grip, and a shank portion [(86)] and [in that it] includes an annular flanged member [(9f)] operatively connected to one end of said motion transmission means [(11)], and slidably mounted on [the] said shank portion.

15. (Amended) [A] The folding frame as claimed in claim 14, wherein [the said] a locking means comprises a lever member [(13)] having one end thereof pivoted to [the] said cursor member [(5k)] and its other end [(13c)] shaped as a hook, and an engaging projecting tooth [(87)] that, when folding frame [(1)] is in its open position, is in engagement with, and retained in a recess [(13a)] formed in said lever member [(13)].

16. (Amended) [A] The folding frame according to claim 14, comprising resilient means [(12)] for resiliently loading said flanged member [(9f)].

17. (Amended) [A] The folding frame according to claim 1, wherein said handle [(8)] comprises a frame lever element [(8d)] secured to said articulated connection structure [(5)] and operatively connected to said motion transmission means [(11)].

18. (Amended) [A] The folding frame as claimed in claim 17, wherein [the said] a locking means comprises a lever member [(13)] having one end

thereof pivoted to [the said] a cursor member [(5k)] and its upper end formed with an engaging tooth [(13c)] arranged to engage with an extension of said articulated connection structure [(5)].

19. (Amended) [A] The folding frame as claimed in claim 18, wherein [the] said lever member [(13)] has [the] said other end at least partly shaped as an inclined plane surface thereby causing the said engaging tooth [(13c)] automatically to engage with said extension.

20. (Amended) A folding frame as claimed in claim 17, wherein [the said] a lever member [(13)] is shaped as a bell crank and is pivoted to [the] said frame handle [(8d)], one arm [(13d)] of said lever member [(13)] being formed [with] a said tooth [(13c)] designed to engage with a respective recess [(85)] provided in [said] a cursor member [(5k)], [whereas the other] and another arm [(13e) extends] extending at an angle with respect to said one arm [(13d)] towards [the] said support block [(8a)].

21. (Amended) [A] The folding frame as claimed in claim 20, wherein [the said] a bell crank [(13)] is spring biased by a spring [(101)].

22. (Amended) [A] The folding frame according to claim 1, wherein said motion transmission means comprises  
at least one cable [(11)],

at least one lever member [(41)] designed to be actuated by said driving device (9) through the at least one cable [(11)],

at least one engagement member [(43)] arranged to be actuated by [the said or by a respective] a lever member [(41)],

at least one rod member [(44)] slidably carried by [a respective] said upper [strut (2a', 2b)] struts and supporting the [said or a respective] an engagement member [(43)], [whereby] thereby actuating [the] said lock-release mechanism [(45, 46)].

23. (Amended) [A] The folding frame according to claim 22, wherein said at least one cable [(11)] is a sheathed cable.

24. (Twice Amended) [A] The folding frame according to [any previous] claim 22 [or 23, characterised in that], wherein said motion transmission means [(11)] comprises at least one strut component [(44)].

25. (Twice Amended) [A] The folding frame according to claim 24, [characterised in that] wherein said strut component [(44)] comprises at least one stay bar.

26. (Twice Amended) [A] The folding frame according to [any previous] claim 23 [to 25, characterised in that], wherein said motion transmission means [(11)] comprises [an] electrically driven motion transmission means.

27. (Twice Amended) [A] The folding frame according to [any previous] claim 23 [to 25, characterised in that], wherein said motion transmission means [(11)] comprises fluid-operated motion transmission means.

28. (Twice Amended) [A] The folding frame according to [any previous] claim, characterised in that] claim 1, wherein the said at least one [lock/release] lock-release mechanism [comprises] is at least one resiliently loaded control member [(44)] operatively connected to and controlled by said motion transmission means [(11)].

Abstract of the Disclosure

B<sup>1</sup> An umbrella-type folding frame particularly for push-chairs having a pair of front upper and lower struts, a pair of rear struts, at least one lock-release mechanism between each upper strut and its respective lower strut, an articulated connection structure between said rear struts and a lifting handle, connected to the articulated structure, which is designed, upon being actuated, to cause the frame to set from an open or extended position to a closed or collapsed position and a driving device located on said frame at the said lifting handle for the remote control of said lock-release mechanism.

---



**UMBRELLA-TYPE FOLDING FRAME PARTICULARLY FOR PUSH-  
CHAIRS**

**RECEIVED**

MAY 02 2003

**GROUP 3600**

**Background of the invention**

**[0001]** The present invention relates to an umbrella-type folding frame particularly, but not exclusively, suitable for push-chairs and the like.

**[0002]** As is known, push-chairs with umbrella-type folding frames, i.e. that fold both transversely and longitudinally, are quite common. Besides, push-chairs, prams and infant seats for cars can be hooked onto these frames.

**[0003]** Generally speaking, folding of these umbrella-type frames takes place in two distinct stages, firstly the user has to release a lock/release articulation mechanism between an upper strut (also called the handle tube) and a lower strut (also referred to hereinafter as the front leg tube), and only after this can the active folding process be carried out.

**[0004]** The releasing of the lock/release mechanism is normally effected by acting on the devices located at the push-chair handle or at the mechanism itself, while the active folding stage is carried out by means of suitable lifting handles, or by pressing or pushing the handle tube downwards to go from an open to a closed position.

**[0005]** This generally means that the user has to employ both hands to close the frame and, in any case, has to carry out two distinct operation steps which make the closing process laborious and also increases the time taken by such an operation.



**Brief Summary of the invention**

**[0006]** The main object of the present invention is to avoid the inconvenience referred to above by providing an umbrella-type folding frame particularly, but not exclusively, suitable for push-chairs and the like.

**[0007]** In this [contest] context, an object of the invention is to provide an umbrella-type folding frame that can be folded or unfolded with a single operation.

**[0008]** Another object of the present invention is to provide an umbrella folding frame that its easy and practical to use.

**[0009]** [Not last] A further object of the present invention is to provide a structurally-simple foldable frame that can be produced at low cost.

**[0010]** These and other objects that will be [better appear] described below, are achieved by an umbrella-type folding frame particularly for push-chairs and the like, comprising a pair of front upper and lower struts, a pair of rear struts, a pair of support or engagement rigid members each having one end thereof pivoted to a respective rear [struts] strut; and its other end slidably engaged with a respective upper strut and secured to a respective lower strut, and at least one lock-release mechanism between each upper strut and its respective lower strut[.]. Also included are a lifting handle, an articulated connection structure between said rear struts, a lifting handle and one driving device located on said articulated structure at the said lifting handle and arranged to control said lock-release mechanism, whereby the sequential effect of said

driving device being actuated and said lifting handle being lifted causes the folding frame to set from an open or extended position to a closed or collapsed position.

[0011] Further scope of applicability of the present invention will become apparent from the detailed description given hereinafter. However, it should be understood that the detailed description and specific examples, while indicating preferred embodiments of the invention, are given by way of illustration only, since various changes and modifications within the spirit and scope of the invention will become apparent to those skilled in the art from this detailed description.

**[Brief description of the drawings] Brief Description of the Drawings**

**[0012]** Further features and advantages of the present invention will become better apparent from the following detailed description of some currently preferred embodiments thereof given by way non-limiting examples only, with reference to the accompanying drawings, in which:

**[0013]** FIGURE 1 shows a perspective view of a folding frame according to the invention in its open condition;

**[0014]** FIGURE 2 shows a perspective view of a folding frame while being closed;

**[0015]** FIGURE 3 shows a perspective view of a folding frame according to the present invention while being closed or collapsed for transportation;

**[0016]** Figure 4 is a diagrammatic perspective view of a double four-bar linkage in its extended position arranged to connect rear struts of the folding frame of Fig. 1;

**[0017]** Figure 5 is a diagrammatic perspective view on a slightly enlarged scale of the double four-bar linkage of Figure 4 in its partly folded or collapsed position;

**[0018]** FIGURE 6 shows a side elevation view of a push-chair attached to a folding frame according to the invention when opened;

**[0019]** FIGURE 6A shows a detail on an enlarged scale of Fig. 6;

**[0020]** FIGURE 7 shows a view similar to that of Figure 6 while the lock/release mechanism is being actuated;

**[0021]** Figure 8 shows a similar view of that of Fig. 7 while the lock-release mechanism is also being lifted upwards after having been actuated;

**[0022]** FIGURE 9 shows a view similar to that of Fig. 8 with the frame fully closed or folded;

**[0023]** FIGURE 10 shows a detail on an enlarged scale of Figs. 6 to 9;

**[0024]** FIGURE 11 is a side elevation view of a push-chair provided with a folding frame mechanism according to a further embodiment of the invention shown in its opened position;

**[0025]** Figure 12 illustrated a detail on an enlarged scale of Fig. 11;

**[0026]** FIGURE 13 shows a perspective view of a pistol grip handle;

**[0027]** FIGURE 14 is a side elevation view of the pistol grip handle illustrated in Figure 13;

**[0028]** FIGURE 15 shows a perspective view of another embodiment of handle grip;

**[0029]** FIGURE 16 shows a side elevation view partly in cross-section of the handle grip of Figure 15;

**[0030]** FIGURE 17 shows a perspective view of a handle mounted for rotation on the frame according to a further embodiment of the present invention;

**[0031]** FIGURE 18 shows a perspective view of a further embodiment of control handle;

**[0032]** FIGURE 19 shows a side elevation view partly in cross-section of the handle of Figure 18;

**[0033]** Figure 20 is a diagrammatic perspective view of a modification of the handle of Figs. 18 and 19;

**[0034]** FIGURE 21 shows a perspective view of a lever handle and locking mechanism assembly;

**[0035]** FIGURE 22 shows a side elevation view partly in cross-section of the assembly illustrated in Figure 21 while being in its locked position;

**[0036]** FIGURE 23 shows a side elevation view of the assembly illustrated in Figure 21 while being activated and released;

**[0037]** FIGURE 24 shows a side elevation view of the assembly illustrated in Figure 21 in its released condition and while the folding frame is being lifted;

**[0038]** FIGURE 25 is a side elevation view partly in cross-section of a modification of the lever handle and locking mechanism assembly of Fig. 21 in its locked position; and

**[0039]** [Figures] FIGURES 26 and 27 show the assembly of Fig. 25 while the locking mechanism is being released and the lever handle is being lifted, respectively.

**[0040]** FIGURES 28 and 29 show details of a modification of Figs. 6 and 6A, respectively, including an electrically driven motion transmission means; and

**[0041]** FIGURES 30 and 31 show details of a further modification of Figs. 6 and 6A, respectively, including a fluid-operated motion transmission means.

**[0042]** In the Figures [In the Figures of the accompanying drawings] the same reference numerals have been used to indicate the same or similar components or parts.

#### **Detailed Description of the preferred embodiments**

**[0043]** With reference first to the embodiment shown in Figs. 1 to 14, an umbrella type folding frame particularly, but not exclusively, suitable for push-chairs and the like according to the present invention, is generally indicated by the reference numeral 1 and comprises a pair of upper and lower front struts, in particular a pair of upper struts (handle tubes) 2a' and 2b' linked to a pair of lower struts (front legs tubes) 2a and 2b, a pair of rear struts 3a and 3b and support rigid members or [cases]

motion transmission means 4a and 4b for the articulation of each front strut with its respective rear strut, as further explained hereinbelow.

**[0044]** As [better visible] shown in Figures 4 and 5, the rear struts 3a and 3b are connected to each other by an articulated connection structure comprising a double four-bar linkage 5 (known per se in the art) comprising upper bars 6a', 6b' and lower bars 6a 6b, diagonal braces 7a and 7b and a rod 60 which is arranged vertical in use.

**[0045]** The articulated structure also has a lifting handle 8 for [manoeuvring] maneuvering the [fourbar] four bar linkage 5 and lifting the entire folding frame so as to cause the folding frame, while in its open or extended position (Fig. 1), to take, if desired, a closed or collapsed position (Figs. 3 and 9). The lifting handle 8 is secured to an articulation upper pin or node 5a (Fig. 13) to which one end of the upper bars 6a, 6b and the (upper) end of the rod 60 are linked.

**[0046]** The four-bar linkage 5 also has a lower pin or node 5b to which one end of the lower bars 6a, 6b and the (lower) end of the rod 60 are linked. Usually, pin 5b also supports a pedal block 5c on which a user's foot can rest while user's hand exerts a lifting force on the handles 2c, in order to make the opening operation easier and quicker and to make sure that double four-bar linkage 5 is fully extended.

**[0047]** Along the rod 60, which is linked to upper pin 5a and lower pin 5b, a cursor 5k is slidably mounted to which one end of each of the diagonal braces 7a, 7b is linked, the other end of the diagonal braces 7a,

7b being pivoted at 67a, 67b to a respective rear strut 3a, 3b together with the other end of the lower bars 6a, 6b.

**[0048]** The double four-bar linkage 5 described above, when in its extended position, keeps the rear struts 3a and 3b spaced apart from each other and the cursor 5k is located in its uppermost position on the rod 60 (Fig. 4), thereby allowing use, e.g. of a push-chair, whereas when in its collapsed position the cursor 5k is caused to slide downwards along the rod 60 and the same struts are moved together so that the frame is folded up for easy transportation (Fig. 5).

**[0049]** The rear lifting handle 8 is arranged to co-operate with one centralized [control] driving device 9 for the remote-control of the motion transmission means 4a and 4b and/or the lock-release mechanisms as described hereinbelow.

**[0050]** As is better shown in Figures 4, 5, 13 and 14, the driving device 9 is a manual device, i.e. it comprises a lever 9a pivoted through a pivoting fulcrum 10 to the handle 8 that has an end linking portion 8a linked to the articulated the upper bars 6a', 6b' at pin 5a and an oblong portion 8b which acts as a resting member for the user's hand while actuating the lever 9a, so as to make the [manoeuvre] maneuver easier. The driving device 9 is designed to control through two steel cables 11, which advantageously are of the sheathed type, a control lever 41 (Figs. 6 to 9) linked at a respective fulcrum 42 secured to the folding frame and spring loaded by a return spring 41 a, preferably supported by the support cases 4a, 4b (Fig. 6A).

**[0051]** More particularly, by acting on the centralized driving device 9 the two steel cables 11 are actuated which operate a respective lever 41 of the transmission means 4a, 4b, whereby each lever 41 is caused to be angularly displaced in order to displace a respective upper pin 43, e. g. projecting from an upper strut 2a', 2b' and secured to a respective control rod 44. Each control rod 44 is slidably mounted inside a respective upper tubular strut 2a', 2b' and has a lower transverse pin 45, which can also project from its locating upper strut. The control rod 44 is preferably resiliently loaded, e.g. by a return spring 44a. The lower pins 45 are each designed to engage with a respective hook 46 secured to its adjacent lower strut 2a, 2b when the folding frame 1 is in its opened or extended position.

**[0052]** At its lower end each upper strut 2a', 2b' is linked to its respective lower strut 2a, 2b by means of a respective connecting rod 47.

**[0053]** More particularly, the motion transmission means 4a, 4b comprises a rigid support body or case that locate a respective lever 41, a return spring 41 a and has one end thereof pivoted at 34 (Fig. 6A) to the upper end of a respective rear strut 3a, 3b and its other end slidably engaged with a respective upper strut 2a', 2b' and secured to a respective lower strut 2a, 2b. Thus, the resultant movement of the upper struts 2a', 2b' with respect to the lower struts 2a, 2b is a combination movement of a sliding displacement through its respective case or body 4a, 4b and a pivotal movement caused by the connecting rod 47.



**[0054]** Moreover, in the above described embodiment of the invention the driving device 9 also acts as a locking means arranged to removably secure the cursor 5k in its uppermost position on the rod 60 in order to block the four-bar linkage 5 in its opened or extended position, so that any unwanted movement of the four-bar linkage 5 is prevented. To this end, the lever 9a is formed with an end tooth 9b designed to engage with a recess 85 provided in the cursor 5k when the four-bar linkage 5 is in its extended position and the lever 9a is in its released position, as better apparent from Figs. 4, 13 and 14, and to be disengaged therefrom when the lever 9a is actuated by the user or the four-bar linkage 5 is in a collapsed or closed condition (Fig. 5).

**[0055]** Advantageously, lever 9a has a lower inclined-plane surface 90 arranged to automatic engage tooth 9b with [opening] recess 85. The lever 9a can also be provided with a limit button 9c (Figs. 13 and 14) arranged to abut against a respective notch 8c in the lifting handle 8 to prevent the engagement tooth 9b from accidentally becoming disengaged from recess 85.

**[0056]** In the embodiment shown in Figs. 11 and 12, components 41, 41 a, 43 and 44 of the transmission means are omitted and thus cables 11 are directly secured to a respective pin 45 and/or extend through the lower tubes 2a, 2b to reach a pin bearing member 45a which is resiliently loaded by spring 44a. In this case, the hook 46 is secured to the upper struts 2a', 2b' and arranged upturned, whereby pin 45 is pulled by its respective cable 11.

**[0057]** Figures 15 and 16 illustrate another embodiment of lifting handle 8 and driving device 9, in which the lifting handle 8 comprises a grip portion 8d shaped as a frame pivoted at 8e to a support block 8a secured to the upper node or pin member 5a supported by the articulated connection structure 5, whereas the driving device 9 includes a manual rocking member 9d that is pivoted to one end 9e of the grip portion 8d of the lifting handle. The rocking member 9d is arranged to actuate the [sheathed] cables 11 that are directly connected to it in order to actuate the transmission means 4a and 4b and/or the pin bearing member 45a.

**[0058]** Figure 17 shows a further embodiment of lifting handle 8 and driving device 9, in which the handle 8 is rotatably mounted on a support block 8a secured to the upper pin 5a. The pin 5a also supports a pulley 80 and a support member 8a which is thus arranged between handle 8 and pulley 80. The pulley 80 is rigid in rotation with the pin 5a and the handle 8. At two diametrically opposite positions of the pulley 80 one end of a cable 11 is secured whose other end is connected either to the motion transmission means or directly to the pin bearing member 45a.

**[0059]** The support member 8a has one or a pair of downwardly extending lugs 82, to which driving device 9 is formed as a trigger-like lever [9] is hingedly hung at 84 which is formed with an engaging tooth 9b designed to engage with an opening 85 provided in the cursor 5k. If desired, the trigger-like lever 9 can be spring-loaded so as to be urged forward, i.e. into engagement with the opening 85, and is formed with a

lower inclined-plane surface 90 for automatic engagement of [lever] driving device (lever) 9 with the [opening] recess 85.

**[0060]** With this arrangement, an angular displacement or partial rotation (e.g. such as indicated by arrow 21) of the handle 8 results in the cables 11 being actuated, thereby controlling either the motion transmission means 4a, 4b or directly the pinbearing member 45a so as to unlock pin 45 from hook 46 before lifting the folding frame 1 (push-chair) for causing it to collapse before lowering it against a support, e.g. the ground, for causing the same to be erected.

**[0061]** A further embodiment of lifting handle 8 and driving device 9 is shown in Figures 18 and 19, wherein the handle 8 has an end T-shaped handling portion 83 and a shank portion 86 on which a manual annular flanged member 9f secured to one end of cables 11 is slidably mounted, so that it can be moved to and fro on the shank portion 86 in contrast with a resilient means, e.g. a return spring 12. The manual annular [component] flanged member 9f also has an engaging tooth 87 projecting downwards that, when the frame 1 is in its open position, is arranged so as to engage with, and to be retained in, a recess 13a formed in a lever member 13. Lever member 13, in turn, has its lower end pivoted at 13b to the cursor 5k and its upper end 13c shaped as a hook designed to engage a respective notch in a [fixed] support portion 8a of the lifting handle 8.

**[0062]** If desired, the lever member 13 can be spring loaded so as to keep it urged towards the cursor 5k and the upper end 13c has its upper front shaped as an inclined plane surface so that the hook automatically

engages with the notch while the folding frame 1 is being erected to its opened position.

**[0063]** Moreover, the shank portion 86 is tubular in structure and has a pair of side slots 86a, in which a transverse pin 86b is slidably mounted and has projecting ends secured to the flanged member 9f.

**[0064]** More particularly, the fixed portion 8a is shaped as an upwardly directed fork, to which the remote end of the shank portion 86 is pivoted at 88, and is secured at the bottom thereof to upper pin 5a of the four-bar linkage 5.

**[0065]** A modification is shown in Figure 20, wherein the annular sliding component 9f is replaced by a pair of crank-like levers 9h to which an end of a respective cable 11 is secured. Each lever 9h has one end pivoted at 9i to the shank 86 of handle 8 and its other end extending at right angles thereto and shaped a small handle.

**[0066]** To cause folding frame 1 to collapse, the user first pulls (against the action of springs 12 and 44a) the annular member 9f or the crank levers 9h towards the Tshaped portion 83 (arrow 89a) so as to disengage pins 45 from their respective hooks 46 and the hook 13c from its respective engaging notch. He then lifts the Tshaped portion 83 upwards (arrow 89b), thereby causing the [stem] shank portion 86 to pivot about the transverse pin 88, thus unlocking the lever member 13. By further lifting the folding frame 1, the user caused it to collapse owing to the weight of the lifting frame.

**[0067]** Another embodiment of lifting handle and driving device 9 is shown in Figures 21 to 24, where the lifting handle 8 comprises a [handle frame] grip portion 8d is the form of a handle frame, which is articulated at 88 to a support [block] portion 8a that is connected to the upper node or pin 5a. Handle frame portion 8d is connected to one end of the cables 11. There is also provided a lever member 13 having its lower end pivoted to the cursor 5k at 13b and having an upper end 13c formed as an engaging tooth [13c] arranged to engage with an extension of upper pin 5a. If desired, the lever member 13 can be spring loaded so as to keep it urged towards the cursor 5k.

**[0068]** When the folding frame 1 is in its opened condition the handle frame portion 8d is in a substantially horizontal position (Fig. 22). For causing the folding frame 1 to collapse, the user pulls backwards the lever member 13 with a finger so as to disengage its [tooth] upper end (engaging tooth) 13c from the lug of pin 5a, then lifts the handle 8d thereby disengaging pins 45 from their hooks 46. By further lifting the folding frame 1, the folding frame 1 is easily caused to collapse.

**[0069]** [It will be realize that also in this case by simply lifting the handle 8 unlocking of pins 45 is caused, which results in substantial simplification of the manoeuvre.] In this case by simply lifting the handle 8, unlocking of pins 45 is caused, which results in substantial simplification of the maneuver. In order to ensure proper operation of this embodiment in any circumstance, care should be taken, when the folding frame is to be folded from its extended or opened condition, that the effort

for partial rotation of the handle 8 for causing pins 45 to disengage from their respective hooks 46, is much lower than the total weight of the folding frame 1[,] otherwise, it might happen that owing to friction or another resisting cause the initial rotation of the handle 8 could result in the folding structure 1 being lifted from ground while the pins 45 are still in engagement with their respective hooks 46, which would prevent folding of the folding frame 1.

**[0070]** On the other hand, once the pins 45 have been disengaged from their hooks 46 collapse of the folding frame 1 occurs as a consequence of the entire structure being lifted upwards still by acting on handle 8.

**[0071]** Figures 25 to 27 show a modification of the lever member 13 of Figs. 21 to 24, in which unfolding of the folding frame 1 occurs in two stages. The lever member 13 is shaped as a bell crank and pivoted to the handle 8d at 100 so that one arm of the lever member extends, in use, substantially parallel to the rod 60 and terminates with an engaging tooth 13c designed to engage with a respective recess 85 provided in the cursor 5k, whereas the other arm 13e is inclined with respect to arm 13d and extending towards the support block 8a. The bell crank 13 is spring biased, e.g. by a spiral pressure spring 101 having one end resting against the handle 8d and its other end abutting against the arm 13e thereby pushing it away from the handle, thus keeping tooth 13c in its engaged position with recess 85.

**[0072]** In order to fold the folding frame 1 starting from its fully extended position, the operator first acts on arm 13e by a finger of his

hand handling handle 8d so as to cause [tooth] upper end (engaging tooth) 13c to disengage from recess 85 against the action of the spring 101. The user then lifts the handle 8d, while keeping his finger on the arm 13e, whereby causing it to pivot about its pivot pin 88 while releasing the locking mechanism owing to the action of cables 11.

**[0073]** It will be noted that the umbrella-type folding frame according to the present invention operates in a very simple manner.

**[0074]** In order to cause collapse of the folding frame from its open (or extended) position to a closed (or collapsed) position, the user has simply to actuate the driving device 9 and lift handle 8 by hand. By so doing the pins 45 are caused to unlock against the thrust of the spring 44a, thus releasing the lower struts 2a, 2b from their respective upper struts 2a', 2b'.

**[0075]** By further lifting the handle 8 the very weight of the entire structure is normally well suited to lead to collapse (or closure) of the folding frame owing to the of operative connection between the components parts, as is well known in the art, e.g. as disclosed in Italian Utility Models no. A-208 263 and no. A-213 692 (both in the name PEG PEREGO). At the end of the lifting operation, the folding frame is fully closed as shown in Figure 10 and can be easily carried or stored by the user.

**[0076]** Disengaging of the lower pins 45 not only releases the upper struts 2a', 2b' but also causes pushing of the upper struts 2a', 2b' downwards owing to the action of springs 44a. This pushing force

overcomes any resistance by the connecting rods 47 and causes a partial rotation upwards of the connecting rods 47 with no jibbing which is of great benefit for the efficiency of the collapsing movement of the folding frame 1.

**[0077]** When moving from closed to open position, closed folding frame 1 is "pulled upwards" at terminal handles 2c. The upper struts 2a', 2b' effect the same movements as in the closing stage but in the reverse direction, thereby moving apart the rear struts 3a and 3b with the result that the double four-bar linkage 5 is extended while the lower pins 45 fit into their locking hooks 46, thus blocking any relative movement between the struts.

**[0078]** Preferably, a pushing action exerted by user's foot on block 5c is added to ensure full extension of double four-bar linkage 5.

**[0079]** If desired, the driving device 9 can comprise a radio transmitting system, e.g. controlled by an automatic button, to transmit a control signal to the motion transmission means 4a, 4b or directly to pins 45.

**[0080]** The invention as described above is susceptible of numerous modifications and variations within the scope of the claims.

[Thus, for example the connection means between the handle grip 9 and the motion transmission means 4a, 4b could be one of a number of mechanical means (e.g. struts, stay rods and various mechanical, electromagnetic or pneumatic or hydraulic systems).

**[0081]** Thus, for example the connection means between the driving device 9 and the motion transmission means 4a, 4b may be one of a



number of means (e.g. struts and stay rods), an electrically driven motion transmission means EM, as shown in Figs. 28 and 29, or a fluid-operated motion transmission means PC1, as shown in Figs. 30 and 31. Reference numerals for elements repeated from Figs. 6 and 6A are also shown.

[The disclosure in Italian patent application no. VR2001A000022 filed on February 20, 2001 from which priority is claimed is incorporated herein by reference.

Any reference sign following technical features in any claim has been provided to increase intelligibility of the claim and shall not be construed as limiting 5 the scope of the claim.]

**[0082]** The invention being thus described, it will be obvious that the same may be varied in many ways. Such variations are not to be regarded as a departure from the spirit and scope of the invention, and all such modifications as would be obvious to one skilled in the art are intended to be included within the scope of the following claims.